

36x Outdoor Speed Dome Network Camera

Weather Proof



- Sony Super HAD II CCD Sensor with Effio DSP in D1 Resolution
- 36x Optical Zoom
- 360° Endless Pan, 200° Tilt
- MPEG-4, MJPEG and H.264 Triple Codec Compression
- 3D Privacy Masks for Private Area Protection
- Weather-Proof (IP66) Casing with Built-in Fan and Heater
- Removable IR-Cut Filter for Day and Night Function
- 1 DI/DO for External Alarm and Sensor Device
- EasyConfig. for Easy Set Up and GUI Integration

OSD-040 36x Series

The Brickcom OSD-040 36x series is a high-end, Speed Dome network camera designed to provide high-quality video surveillance for outdoor environments. By offering H.264 / M-JPEG / MPEG-4 triple codec compression, it is able to provide a flexible system which does not require high bandwidth or storage capabilities.

The advanced features of the OSD-040 36x series work together to create crystal-clear video surveillance. By adopting a powerful 36x optical zoom lens with auto focus, it can easily provide clear close-up shots of objects. The Sony Super HAD II CCD sensor with Effio DSP(Digital Signal Processor) and removable IR-cut filter significantly improve the light sensitivity of the OSD-040 36x series, providing excellent surveillance in both day and night settings. When its Wide Dynamic Range (WDR) sensor, the camera can handle extreme variations of brightness within the same sense. The WDR sensor averages out the very bright and very dark areas to create a more even exposed video scene which is close to what the human eye would see.

Along with high-level sensors, the OSD-040 36x series is equipped with a fast and precise pan/tilt mechanical design. The 360° continuous pan and -10° ~190° tilt combine with a rotation speed of 0.5° ~400° per second to provide complete coverage of every angle. With such powerful pan, tilt and zoom capabilities and a weather-proof casing (IP66), this camera is perfect for environments where precision and reliability are key; such as railway stations, airports, warehouses, and production facilities.

OSD-040 36x Series

Product Name

36x Outdoor Speed Dome Network Camera

Model Number

OSD-040D 36x - NTSC

OSD-040E 36x - PAL

Hardware System

CPU: 500 MHz

Flash: 16M

RAM: 128M DDR

Image Sensor

Sensor Type : 1/4" Sony Super HAD II CCD Sensor with Sony Effio DSP

Sensor Resolution: 720x480(NTSC)
720x576(PAL)

Minimum Illumination:

Color: 0.1 Lux, B/W: 0.01 Lux

Lens

36x Optical Zoom Lens

Focal Length: f= 3.4 ~ 122.4 mm

F number: F1.6 ~ F4.5

Horizontal View Angle : 1.7° ~ 55.8°

Removable IR Cut Filter

Auto Iris/ Auto Focus

Video

Auto Exposure Control / Auto White Balance /

Auto Gain Control

Image Compression Format :

H.264 / MPEG4 / MJPEG

Image Resolution and Frame Rate

OSD-040D 36x: 720x480: 30 fps

OSD-040E 36x: 720x576: 25 fps

Audio

2-way audio

External MIC/Line Input

External Audio Output

Network

Ethernet : one 10/100Mbps RJ-45

Supported Protocols : TCP/IP, UDP, ICMP, DHCP, NTP, DNS, DDNS, SMTP, FTP, HTTP, Samba, PPPoE, UPnP, Bonjour, RTP, RTSP, RTCP

Pan/Tilt/Zoom

Pan: 360°, 0.5°~400°/s

Tilt: 200°(-10°~190°) , 0.5°~400°/s

Zoom: 36x Optical Zoom
12x Digital Zoom

Interface

AC Power In

Ethernet Cable Connector

General I/O Terminal Block

Video Out(BNC)

External MIC/Line Input

External Audio Output

Power

AC 24V ± 10%

Max Power consumption

65 w (with Heater)

Environment

Operating Temperature : -45°C ~ 50°C (-49°F ~122°F)

Operating Humidity : 20% ~ 80%

Dimension

Ø 190 x 302.5mm (7.5x 11.9 Inches), with sunshield

Weight


2.6 kg (5.7 lbs)

Certification

FCC, CE, IP-66

Warranty

Limited 2-year warranty

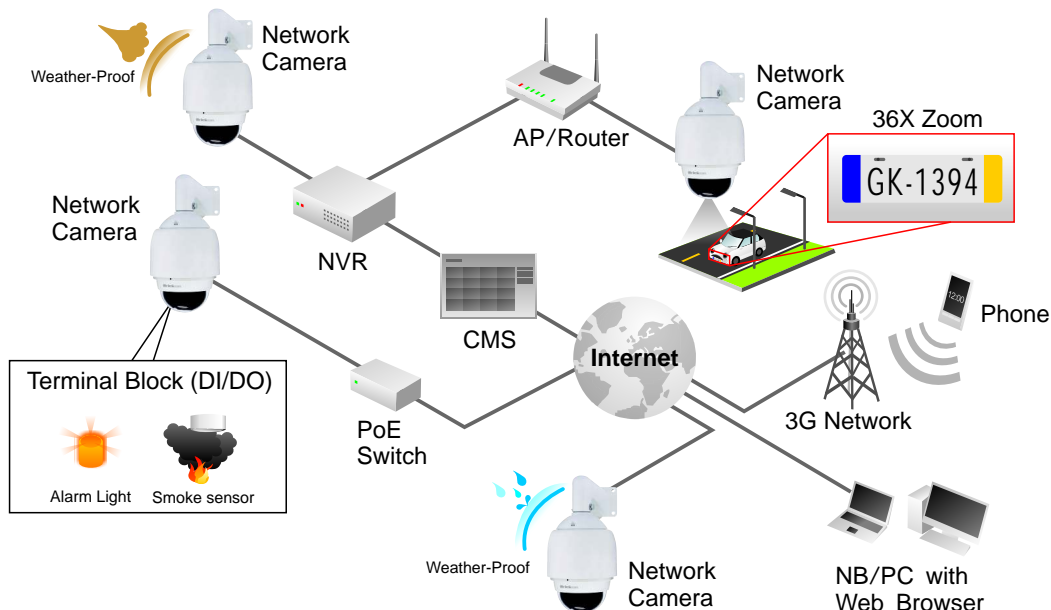

© Brickcom Technology Inc. All Rights Reserved. This document is for planning purposes only, and is not intended to modify or supplement any specifications or warranties relating to products of Brickcom Technology. Brickcom may make changes to specifications and descriptions at any time, without notice.

Brickcom Corporation Headquarters
 Address: No. 1, Jen Ai Rd., Hsinchu Industrial Park, Hukou, Hsinchu, Taiwan, R.O.C. 303
 Tel: +886-3-5982022 Fax: +886-3-5982023
 Mail: info@brickcom.com http://www.brickcom.com